
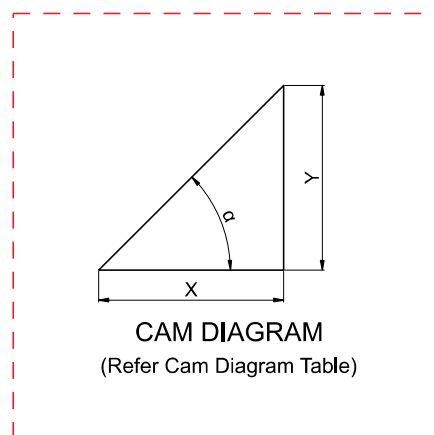
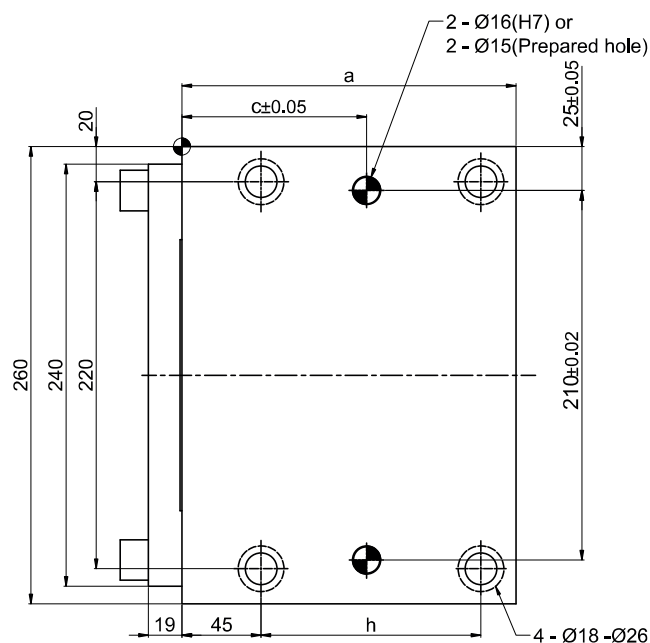
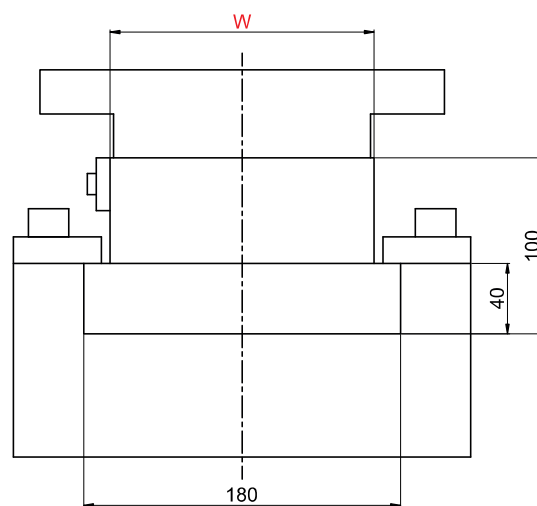
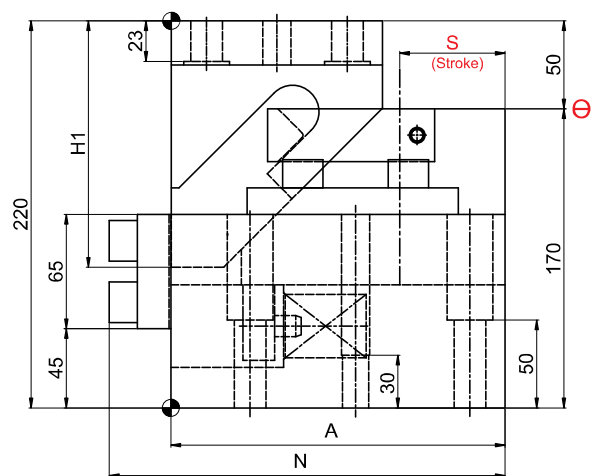
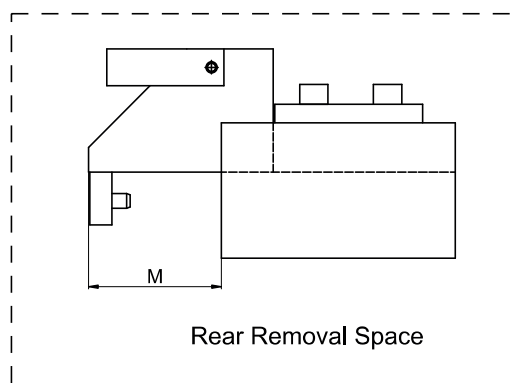


► Cam Unit - PCU-CS1-150-(00)

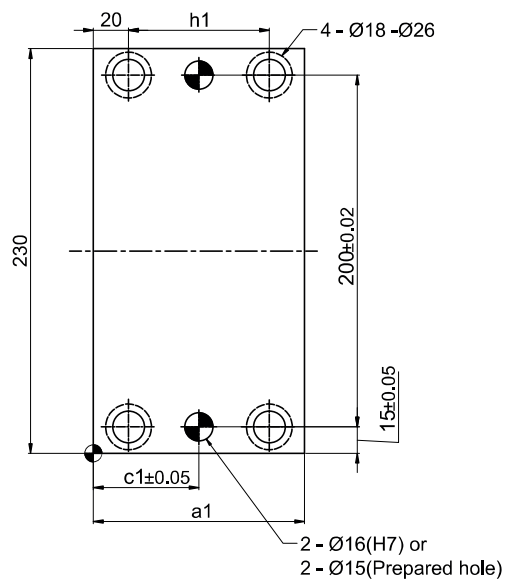

(Refer Cam Dimension Table)

► Cam Unit - PCU-CS1-150-(00)

Cam Dimensions													Cam Diagram		
W	Θ	S	A	H1	N	a	a1	c	c1	h	h1	M	X	Y	α
150	00	40	190	140	225	190	120	105	60	125	80	108	40	40	45°
		60	210	160	245	200	140	110	70	135	100	100	60	60	

Spring Force									
Working force KN(tonf)		Spring load N (kgf)			Total weight kg	Catalog No.	W	Θ	Slide Stroke S
Standard working force	Max. working force	Preload	5 mm before bottom dead centre	Max. load.					
58.8 (6.0)	88.3 (9.0)	307 (31.3)	1651 (168.4)	1843 (188.0)	63.0	PCU-CS1	150	00	40
		333 (33.9)	1741 (177.5)	1869 (190.6)	69.0				60

Order Type - Code-Size(W)- Θ -Stroke(S)

Example - PCU-CS1-150-00-40



Alternations-

Option Code(OC)	Specifications
GS	Cam with Gas Spring NFS-S6-25-50-RED (only applicable for CS1-150-00-40)

Order Type:- CODE-SIZE(W)- Θ -STROKE(S)-OC

Example:- PCU-CS1-150-00-40-GS