

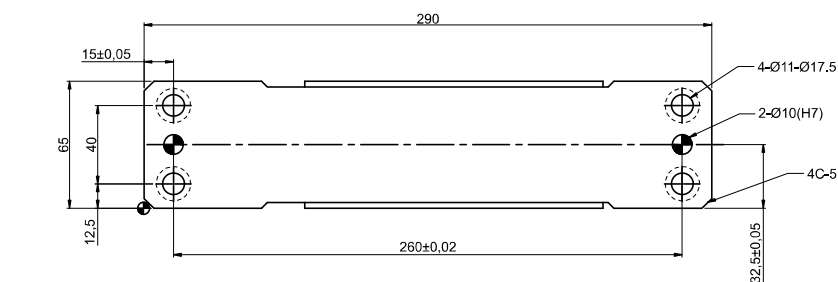
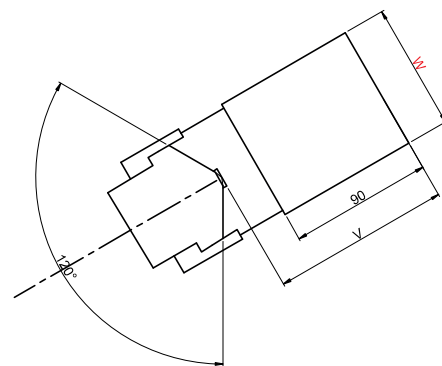




► Cam Unit - PCU-CS7-65-(60-75)

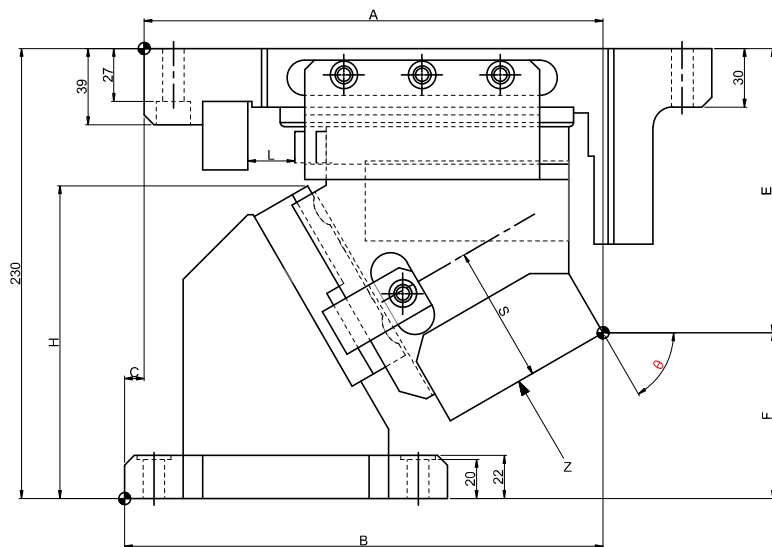

REAR REMOVAL SPACE



Z-View

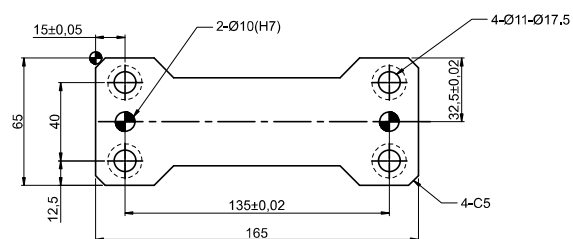

CAM DIAGRAM
(Refer Cam Diagram Table)

► Cam Unit - PCU-CS7-65-(60-75)

Cam Dimensions											Cam Diagram		
W	θ	A	B	C	E	F	H	L	V	M	X	Y	α
65	60°	234.5	244.5	10	145.31	84.69	159.8	35	90	64	70	60.6	0°
	65°	231.79	276.79	45	146.72	83.28	145.2	29	130	86	68.5	62.2	
	70°	228.97	173.97		147.89	82.11	159.0	23		85	67.2	63.2	0°
	75°	233.82	278.82		167.79	62.21	153.5	18		80	69.5	67.2	

Spring Force									
Slide Stroke S	Working force KN (tonf)		Spring load N (kgf)			Total weight kg	Catalog No.	W	θ
	Standard working force	Max. working force	Preload	5mm before bottom dead center	Max. load				
70.0	68.6 (7.0)	137.3 (14.0)	0 (0.0)	5561(567.0)	5989 (610.7)	16.4	PCU-CS7	65	60°
68.5				5506(561.5)	5936 (605.3)	18.0			65°
27.2				5429(553.6)	5863 (597.8)	18.0			70°
69.5				4878(497.4)	5258 (536.1)	17.5			75°

Order Type:- CODE-SIZE(W)- θ

Example:- PCU-CS7-65-10