
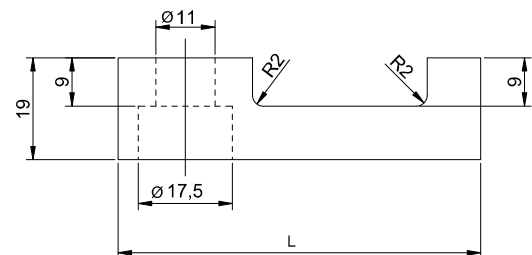
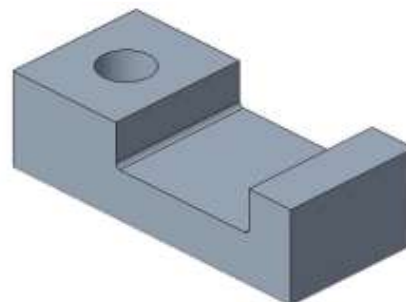





► POSITIVE RETURN FOLLOWER (PCU-CA28)S

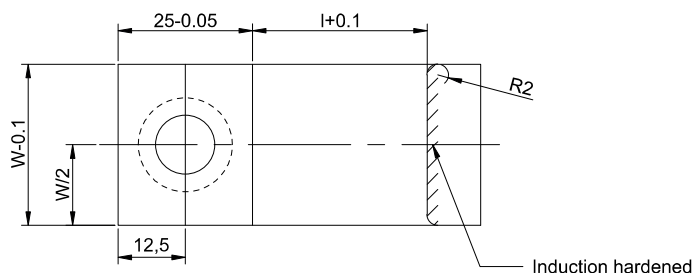

I	Catalog No.	W	L
32.4	PCU-CA28	30	67.5
42.4		35	77.5

Material : EN8
 Hardness : 50~60HRC (Induction hardened)
 Order Type : PCU-CA28-W-L
 Example : PCU-CA28-S-30-67.5


► POSITIVE RETURN FOLLOWER (PCU-CA29)B,S

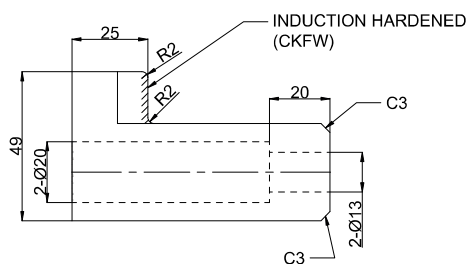

Type B



Type S

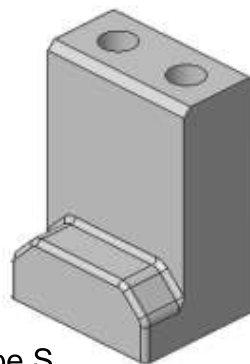

I	I1	Catalog No.	W	L
30	15	PCU-CA29	60	85
40	20		80	

Material : Copper alloy Special solid lubricant (embedded)
 Order Type : PCU-CA29-W-L-Type
 Example : PCU-CA29-60-85-B

Material : EN8
 Hardness : 55 HRC
 Order Type : PCU-CA29-W-L-Type
 Example : PCU-CA29-60-85-S