
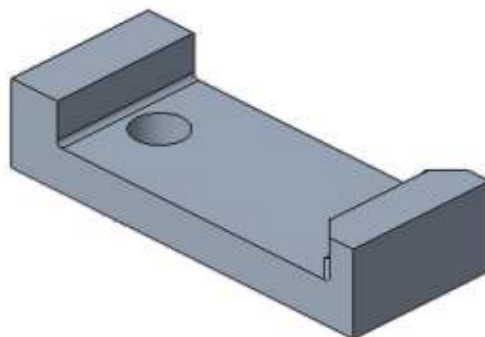


► POSITIVE RETURN FOLLOWER (PCU-CA32)

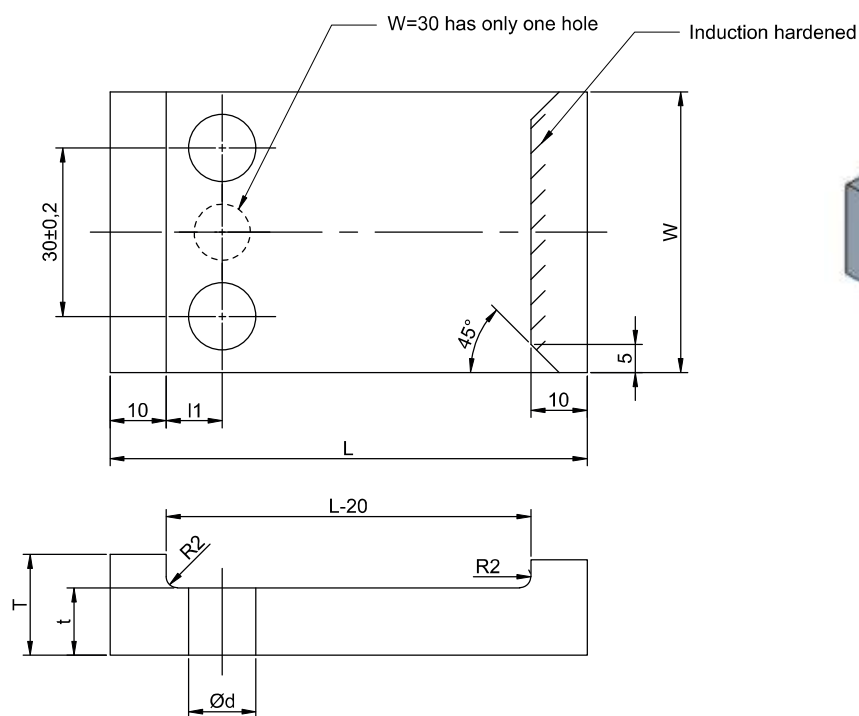

l1	T	t	Ø d	No. of screw holes	Catalog No.	W	L	X
7.5	16	8	10	1	PCU-CA32	30	55	35
							75	55
10	18	10	12	2		50	65	45
							85	65
							105	85

Material : EN8

Hardness : 55 HRC (Induction hardened)

Order Type : PCU-CA32-W-L

Example : PCU-CA32-30-55