




► SIDE BLOCKS-B (PCU-CA33,34)

- W=25
- W=40 - 50, L=100







- W=>40 L=250

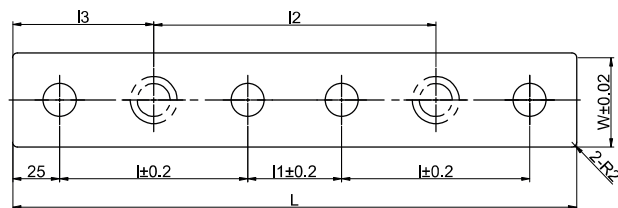

- ▲ The hole for safety screw (alteration) is only for W=40, 50

- W=>40 L=150 - 200

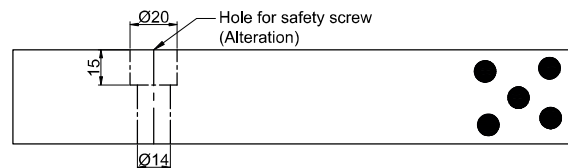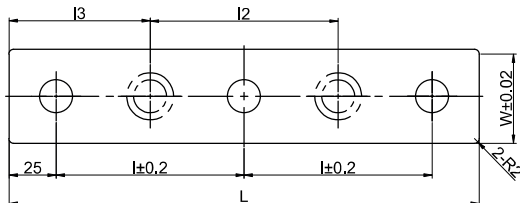

L	L1	L2	L3	d	Catalog No.	W	L	T
45	—	—	—	11	PCU-CA33	25	75	25
50							100	
75							125	
100							150	
50	—	—	—	14	PCU-CA33 PCU-CA34	40	100	30
		50	50				150	
75	50	75	62.5				200	
		125	62.5				250	
50	—	—	—				100	40
		50	50				150	
75	50	75	62.5				200	
		125	62.5				250	

L	L1	L2	L3	d	Catalog No.	W	L	T
50	—	—	—	20	PCU-CA33 PCU-CA34	50	100	45
		50	50				150	
75	50	75	62.5				200	
		125	62.5				250	
50	—	—	—				100	55
		50	50				150	
75	50	75	62.5				200	
		125	62.5				250	
50	—	50	50				150	60
		75	62.5				200	
75	50	125	62.5				250	
		—	—				—	
50	—	50	50				150	70
		75	62.5				200	
75	50	125	62.5				250	
		—	—				—	

Material : Copper alloy Special solid lubricant (embedded)

Order Type : PCU-CA33-W-L-T

Example : PCU-CA33-50-200-55